



TWINS LINE

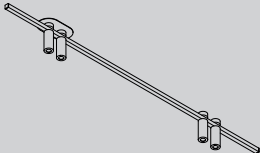
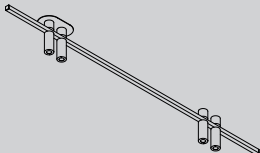
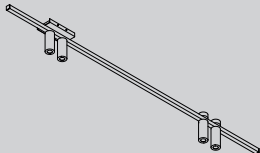
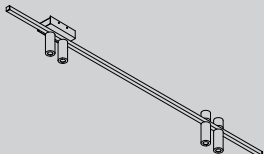
CEILING — Design by Glenn Marys

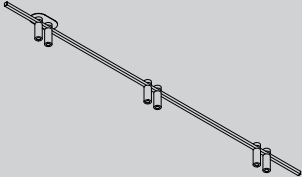
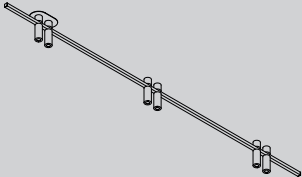
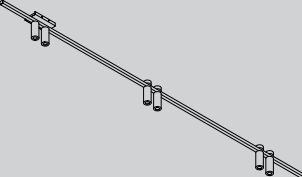
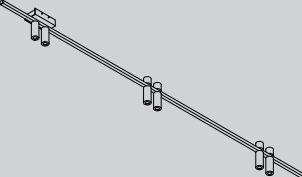
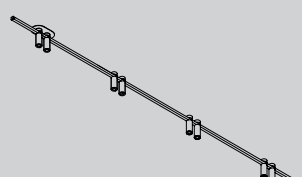
PRODUCT INFORMATION

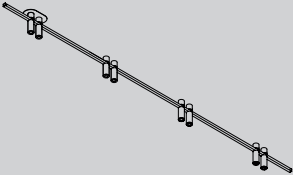
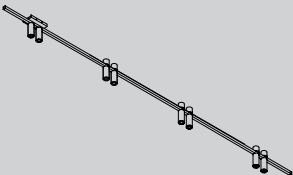
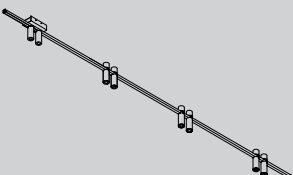
tossB

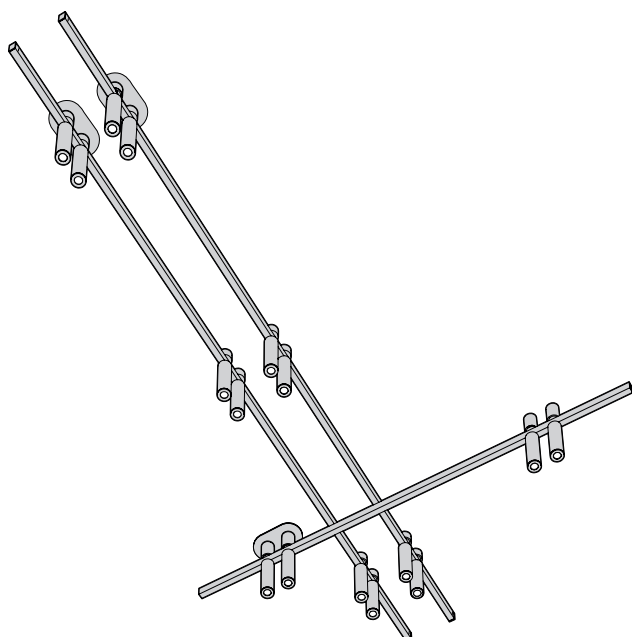
TWINS LINE




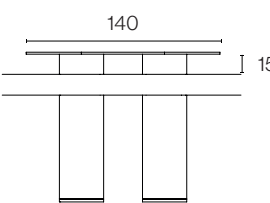
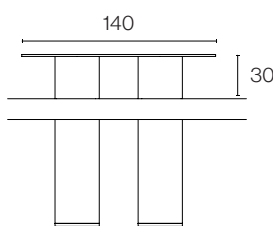
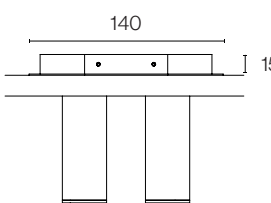
Ceiling — Design by Glenn Marys

	TWINS LINE 1200 CEILING PLATE H15	FINISH & ORDER CODE Black T110C22P15DZL White T110C22P15DWL Brushed alu T110C22P15DAB Bronze T110C22P15DOE Brushed brass T110C22P15DLB Light bronze T110C22P15DBL	LIGHT SPECS & ELECTRO Lamp type: LED Colour temp: 2700K Fitting: - Max. watt: 16W Voltage: 46V - 350mA Lumen: 1600 Gear: NOT INCLUDED Beam angle: 45° CRI: 90
	EXCL. DRIVER ADDITIONAL INFORMATION 3000K available - Beam angle 10° and 25° available For plasterboard ceiling- Hole size: 55-75 mm x h35mm Remote driver required		 IP20
	TWINS LINE 1200 CEILING PLATE H30	FINISH & ORDER CODE Black T110C22P30DZL White T110C22P30DWL Brushed alu T110C22P30DAB Bronze T110C22P30DOE Brushed brass T110C22P30DLB Light bronze T110C22P30DBL	LIGHT SPECS & ELECTRO Lamp type: LED Colour temp: 2700K Fitting: - Max. watt: 16W Voltage: 46V - 350mA Lumen: 1600 Gear: NOT INCLUDED Beam angle: 45° CRI: 90
	EXCL. DRIVER ADDITIONAL INFORMATION 3000K available - Beam angle 10° and 25° available For plasterboard ceiling- Hole size: 55-75 mm x h35mm Remote driver required		 IP20
	TWINS LINE 1200 CEILING BASE H15	FINISH & ORDER CODE Black T110C22B15DZL White T110C22B15DWL Brushed alu T110C22B15DAB Bronze T110C22B15DOE Brushed brass T110C22B15DLB Light bronze T110C22B15DBL	LIGHT SPECS & ELECTRO Lamp type: LED Colour temp: 2700K Fitting: - Max. watt: 16W Voltage: 46V - 350mA Lumen: 1600 Gear: NOT INCLUDED Beam angle: 45° CRI: 90
	EXCL. DRIVER ADDITIONAL INFORMATION 3000K available - Beam angle 10° and 25° available Hole size: 60 mm x h35mm Remote driver required		 IP20
	TWINS LINE 1200 CEILING BASE H30	FINISH & ORDER CODE Black T110C22B30DZL White T110C22B30DWL Brushed alu T110C22B30DAB Bronze T110C22B30DOE Brushed brass T110C22B30DLB Light bronze T110C22B30DBL	LIGHT SPECS & ELECTRO Lamp type: LED Colour temp: 2700K Fitting: - Max. watt: 16W Voltage: 46V - 350mA Lumen: 1600 Gear: NOT INCLUDED Beam angle: 45° CRI: 90
	EXCL. DRIVER ADDITIONAL INFORMATION 3000K available - Beam angle 10° and 25° available Hole size: 60 mm x h35mm Remote driver required		 IP20

	TWINS LINE 1800 CEILING PLATE H15	FINISH & ORDER CODE Black T110C28P15DZL White T110C28P15DWL Brushed alu T110C28P15DAB Bronze T110C28P15DOE Brushed brass T110C28P15DLB Light bronze T110C28P15DBL	LIGHT SPECS & ELECTRO Lamp type: LED Colour temp: 2700K Fitting: - Max. watt: 24W Voltage: 68V - 350mA Lumen: 2400 Gear: NOT INCLUDED Beam angle: 45° CRI: 90
	EXCL. DRIVER ADDITIONAL INFORMATION 3000K available - Beam angle 10° and 25° available For plasterboard ceiling- Hole size: 55-75 mm x h35mm Remote driver required		 IP20
	TWINS LINE 1800 CEILING PLATE H30	FINISH & ORDER CODE Black T110C28P30DZL White T110C28P30DWL Brushed alu T110C28P30DAB Bronze T110C28P30DOE Brushed brass T110C28P30DLB Light bronze T110C28P30DBL	LIGHT SPECS & ELECTRO Lamp type: LED Colour temp: 2700K Fitting: - Max. watt: 24W Voltage: 68V - 350mA Lumen: 2400 Gear: NOT INCLUDED Beam angle: 45° CRI: 90
	EXCL. DRIVER ADDITIONAL INFORMATION 3000K available - Beam angle 10° and 25° available For plasterboard ceiling- Hole size: 55-75 mm x h35mm Remote driver required		 IP20
	TWINS LINE 1800 CEILING BASE H15	FINISH & ORDER CODE Black T110C28B15DZL White T110C28B15DWL Brushed alu T110C28B15DAB Bronze T110C28B15DOE Brushed brass T110C28B15DLB Light bronze T110C28B15DBL	LIGHT SPECS & ELECTRO Lamp type: LED Colour temp: 2700K Fitting: - Max. watt: 24W Voltage: 68V - 350mA Lumen: 2400 Gear: NOT INCLUDED Beam angle: 45° CRI: 90
	EXCL. DRIVER ADDITIONAL INFORMATION 3000K available - Beam angle 10° and 25° available Hole size: 60 mm x h35mm Remote driver required		 IP20
	TWINS LINE 1800 CEILING BASE H30	FINISH & ORDER CODE Black T110C28B30DZL White T110C28B30DWL Brushed alu T110C28B30DAB Bronze T110C28B30DOE Brushed brass T110C28B30DLB Light bronze T110C28B30DBL	LIGHT SPECS & ELECTRO Lamp type: LED Colour temp: 2700K Fitting: - Max. watt: 24W Voltage: 68V - 350mA Lumen: 2400 Gear: NOT INCLUDED Beam angle: 45° CRI: 90
	EXCL. DRIVER ADDITIONAL INFORMATION 3000K available - Beam angle 10° and 25° available Hole size: 60 mm x h35mm Remote driver required		 IP20
	TWINS LINE 2400 CEILING PLATE H15	FINISH & ORDER CODE Black T110C31P15DZL White T110C31P15DWL Brushed alu T110C31P15DAB Bronze T110C31P15DOE Brushed brass T110C31P15DLB Light bronze T110C31P15DBL	LIGHT SPECS & ELECTRO Lamp type: LED Colour temp: 2700K Fitting: - Max. watt: 32W Voltage: 91V - 350mA Lumen: 3200 Gear: NOT INCLUDED Beam angle: 45° CRI: 90
	EXCL. DRIVER ADDITIONAL INFORMATION 3000K available - Beam angle 10° and 25° available For plasterboard ceiling- Hole size: 55-75 mm x h35mm Remote driver required		 IP20

	TWINS LINE 2400 CEILING PLATE H30	FINISH & ORDER CODE Black T110C31P30DZL White T110C31P30DWL Brushed alu T110C31P30DAB Bronze T110C31P30DOE Brushed brass T110C31P30DLB Light bronze T110C31P30DBL	LIGHT SPECS & ELECTRO Lamp type: LED Colour temp: 2700K Fitting: - Max. watt: 32W Voltage: 91V - 350mA Lumen: 3200 Gear: NOT INCLUDED Beam angle: 45° CRI: 90
	EXCL. DRIVER ADDITIONAL INFORMATION 3000K available - Beam angle 10° and 25° available For plasterboard ceiling- Hole size: 55-75 mm x h35mm Remote driver required	 IP20	
	TWINS LINE 2400 CEILING BASE H15	FINISH & ORDER CODE Black T110C31B15DZL White T110C31B15DWL Brushed alu T110C31B15DAB Bronze T110C31B15DOE Brushed brass T110C31B15DLB Light bronze T110C31B15DBL	LIGHT SPECS & ELECTRO Lamp type: LED Colour temp: 2700K Fitting: - Max. watt: 32W Voltage: 91V - 350mA Lumen: 3200 Gear: NOT INCLUDED Beam angle: 45° CRI: 90
	EXCL. DRIVER ADDITIONAL INFORMATION 3000K available - Beam angle 10° and 25° available Hole size: 60 mm x h35mm Remote driver required	 IP20	
	TWINS LINE 2400 CEILING BASE H30	FINISH & ORDER CODE Black T110C31B30DZL White T110C31B30DWL Brushed alu T110C31B30DAB Bronze T110C31B30DOE Brushed brass T110C31B30DLB Light bronze T110C31B30DBL	LIGHT SPECS & ELECTRO Lamp type: LED Colour temp: 2700K Fitting: - Max. watt: 32W Voltage: 91V - 350mA Lumen: 3200 Gear: NOT INCLUDED Beam angle: 45° CRI: 90
	EXCL. DRIVER ADDITIONAL INFORMATION 3000K available - Beam angle 10° and 25° available Hole size: 60 mm x h35mm Remote driver required	 IP20	



TWINS LINE PROFILE 	TWINS TUBE 75 		
TWINS LINE 1200 	TWINS LINE 1800 	TWINS LINE 2400 	
CEILING PLATE H15 	CEILING PLATE H30 	CEILING BASE H15 	CEILING BASE H30 