

EQUALIZER


design lbrand










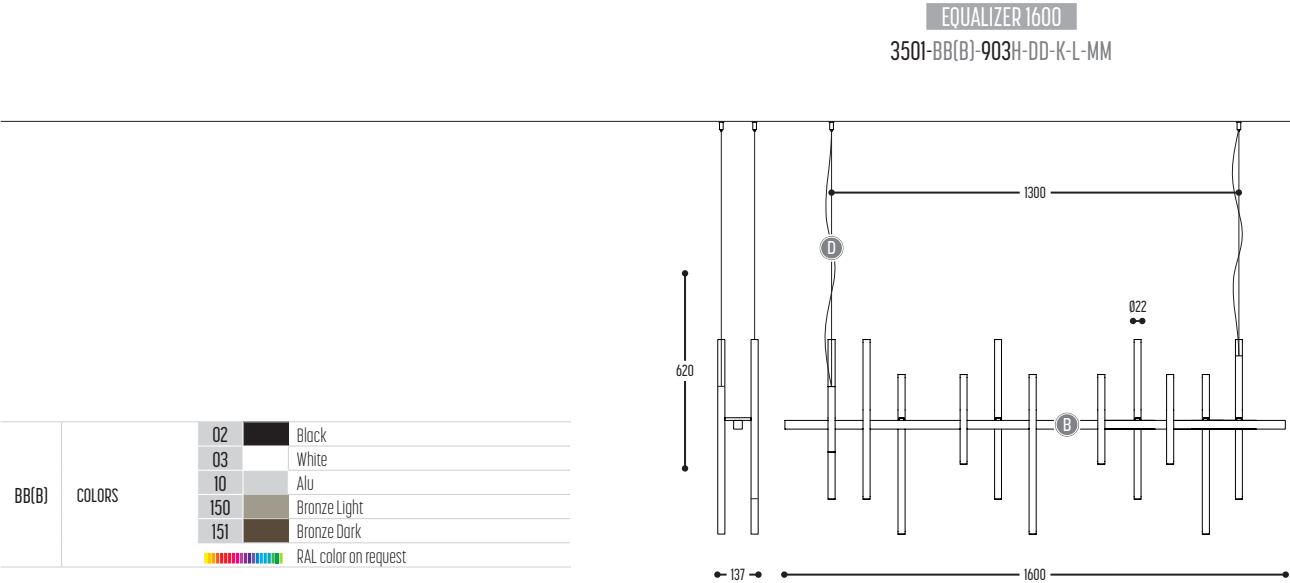

BB(B)	COLORS	02	Black
		03	White
		10	Alu
		150	Bronze Light
		151	Bronze Dark
			RAL color on request
EFF	CRI • LUMENOUTPUT	903	>90 CRI • 350 mA / 3,5 W
H	COLOR TEMP.	2	2700K
		3	3000K
DD	SUSP. CABLE	01	1,5 m
		02	2,5 m
K	DRIVER	0	Non dimmable (extern)
		3	Dali / Push Dim (extern)
L	LIGHTING	1	down (1 driver extern) 9x 280 Lm
		2	up/down (2 drivers extern) 18x 280 Lm
MM	TYPE	01	1600 Concrete ceiling - driver remote - down
		02	1600 Concrete ceiling - driver remote - up/down
		03	1600 Concrete ceiling - driver in ceiling base - down
		04	1600 Concrete ceiling - driver in ceiling base - up/down
		05	1600 Plaster board - driver recessed in base - down
		06	1600 Plaster board - driver recessed in base - up/down
		07	1600 Plaster board - driver remote - down
		08	1600 Plaster board - driver remote -up/ down


Technical mounting data: see big catalog 2025 p.172 or www.dark.be

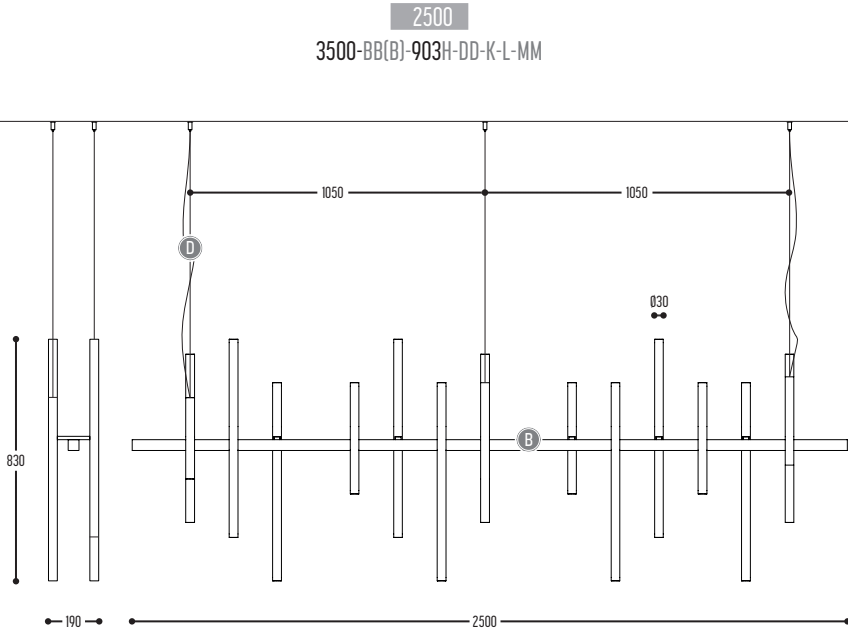

BB(B)	COLORS	02	Black
		03	White
		10	Alu
		150	Bronze Light
		151	Bronze Dark
		 RAL color on request	
EFF	CRI • LUMENOUTPUT	903	>90 CRI • 350 mA / 6,4 W
H	COLOR TEMP.	2	2700K
		3	3000K
DD	SUSP. CABLE	01	1,5 m
		02	2,5 m
K	DRIVER	0	Non dimmable (extern)
		3	Dali / Push Dim (extern)
L	LIGHTING	1	down (1 driver extern) 10x 420 Lm
		2	up/down (2 drivers extern) 20x 420 Lm
MM	TYPE	01	2500 Concrete ceiling - driver remote - down
		02	2500 Concrete ceiling - driver remote - up/down
		03	2500 Concrete ceiling - driver in ceiling base - down
		04	2500 Concrete ceiling - driver in ceiling base - up/down
		05	2500 Plaster board - driver recessed in base - down
		06	2500 Plaster board - driver recessed in base - up/down
		07	2500 Plaster board - driver remote - down
		08	2500 Plaster board - driver remote -up/ down

Technical mounting data: see big catalog 2025 p.172 or www.dark.be



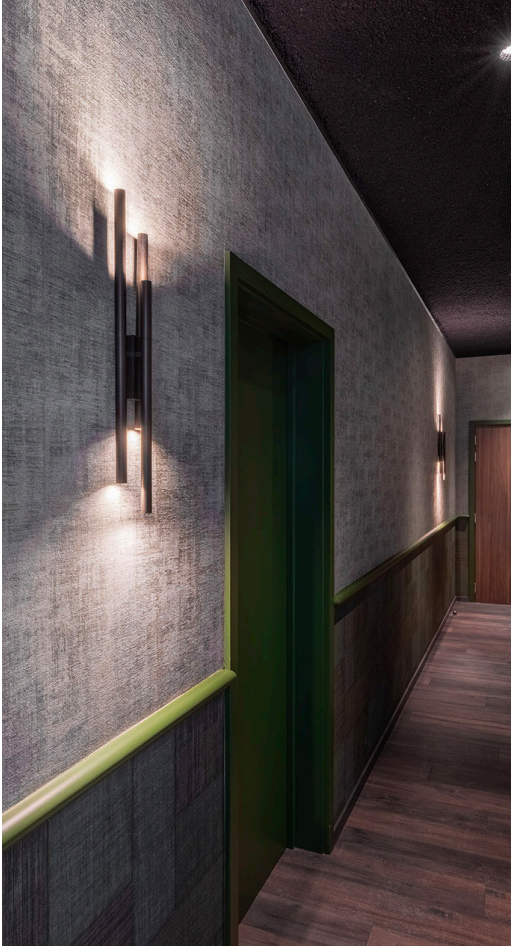


BB(B)	COLORS	02	Black
		03	White
		10	Alu
		150	Bronze Light
		151	Bronze Dark
			RAL color on request
EFF	CRI • LUMENOUTPUT	903	>90 CRI • 350 Lm / 350 mA / 3,5 W
H	COLOR TEMP.	2	2700K
		3	3000K
K	DRIVER	0	Non dimmable (extern/intern)*
		3	Dali (extern/intern)
		4	Phase cut (extern/intern)*
*To be confirmed by Order			
Metal-Alu			
       			

EQUALIZER WALL

35

EQUALIZER WALL

3502-BB(B)-903H-K

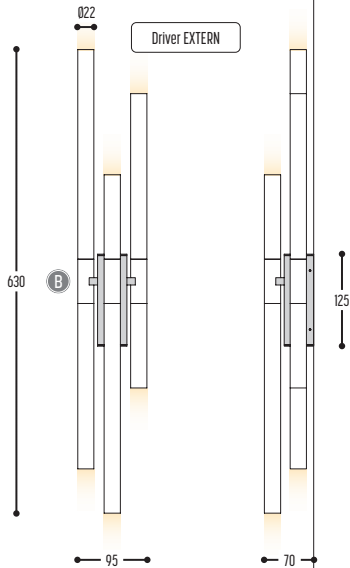

EQUALIZER WALL

3502-BB(B)-903H-K-IN

